



# enviro midori

Combining a fresh, modern finish with drainage capabilities to eliminate surface water runoff, 80mm (3.15") thick Enviro Midori pavers are optimized for mechanical installation, with interlocking spacer bars for enhanced surface stability. Available in multiple sizes and packaging configurations, these pavers pattern and combine seamlessly with other 80mm pavers to create unique designs.



Paver: Enviro Midori, Milano with  
Hydr'eau Pave, Mackinaw inset and border



Vehicular Traffic




Permeable



# enviro midori

## SIZES

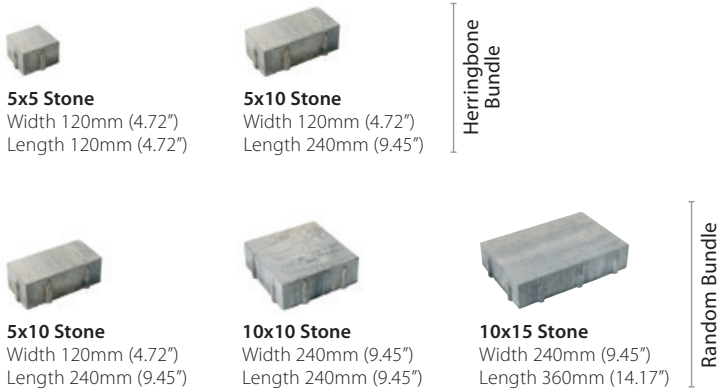

## COLORS



## SPECIFICATIONS

Bundle Specifications						Per Section Specifications				
ENVIRO MIDORI	Layers	Sq. Ft.	Lin. Ft.	Pieces	Weight	Sections	Sq. Ft.	Lin. Ft.	Pieces	Weight
5x5 5x10	Herringbone	6	52.1	66	1811	Layer	8.7	11	6	302
									25	
5x10 10x10 10x15	Random	6	74.4	94.5 (sailor)	2675	Layer	12.4	15.7 (sailor)	10	446
									9	
									4	

All Oaks Landscape products fully meet or exceed the latest version of CSA A231, ASTM C936, ASTM C1372 or ASTM C1782 as applicable to the specific product and area of sale.

To find a dealer nearest you please visit:

**OAKSpavers.com**

Or, call us toll free at:

**1.800.709.OAKS (6257)** (Canada)

**1.800.876.OAKS (6257)** (USA)

Members of:



Product representations shown in this publication are intended to convey the general color, texture and appearance of the product. Variations may occur in the manufacturing and printing process. Always select from an actual product sample.